



dolphitech

DOLPHICAM2+ PRODUCT SPECIFICATION

The dolphicam2+ is capable of high-resolution imaging and precise measurements for a wide range of material types including composites, metals and multi materials.

With a straightforward, quick to deploy, user-friendly system, technicians of all experience levels can generate analysis-ready images of materials in real time for quick decision making.





Black Box and Rugged Tablet

The dolphicam2+ consists of a rugged 14" DT340T tablet with a combined table stand and Black Box mounting bracket on its rear.

A kick stand allows you to prop your device at almost any angle that's convenient for you.

Weighing less than 5kg and with the 40% larger screen size than the dolphicam2, it makes the DC2+ ideally suited for in service and manufacturing inspections.

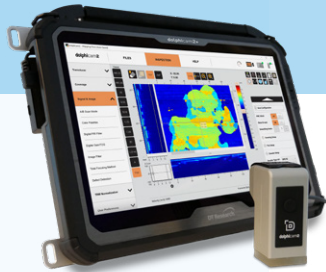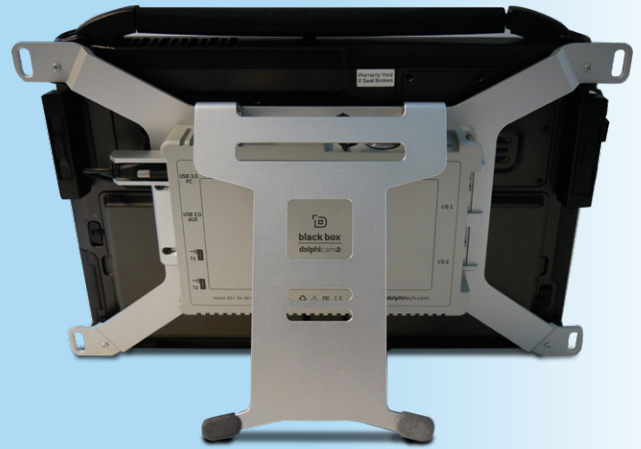

Features

- ✓ Anti-glare screen
- ✓ Can connect to external PC
- ✓ Audio buzzer
- ✓ Bluetooth
- ✓ Wi-Fi (can be disabled for military mode)

Size and weight

| | |
|---------------------------|------------------|
| Tablet, Black Box and TRM | 5.2kg / 11.2lb |
| Size (combined) | 376 x 244 x 61mm |
| Size (Black Box) | 200 x 130 x 32mm |
| Size (tablet) | 376 x 244 x 29mm |

Technical details

| | |
|--------------------|-----------|
| Transducer ports | 2x USB C |
| Other connections | Ethernet |
| Battery | 6-8 hours |
| Ingress protection | IP66 |
| PC/Host port | USB C |

The tablet has a daylight-readable display with gloved-multitouch and waterproof digitizer pen.



The Black Box itself is the heart of the system, driving the TRM while connecting to the tablet which runs and displays the software.

The IP66 sealing gives the device full protection against dust, and also protects against low pressure water jets from all directions.


The tablet is equipped with an Intel® 8th Generation Core™ i quad-core processor.



dolphicam2+ and dolphicam2


Software

The dolphicam2+ software is unique among NDT packages, designed from the ground up to complement the imaging capabilities of the platform. Ultrasonic images are shown not just using conventional signal amplitudes, but also as time of flight, opening up a world of instant, color-coded thickness mapping. This is helped further by the live 3D characterization view, which instantly enhance visualization and can be readily interpreted by different levels of end-users.

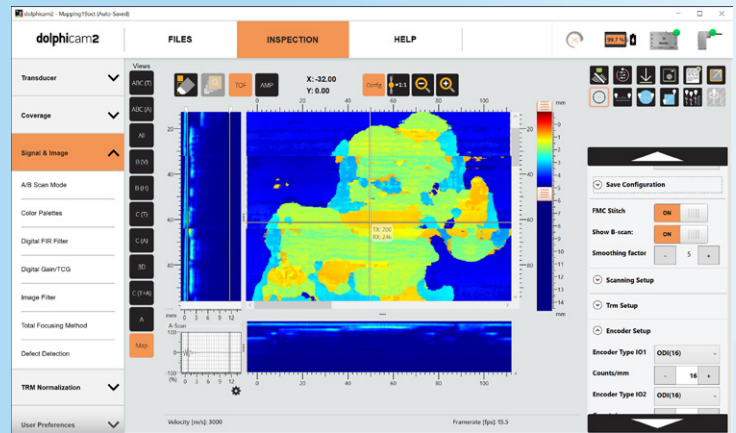


Measurements

- Depth B-scan
- Line in C-scan
- Depth & Amplitude in C-scan
- Rectangle (Width, Height, Area)
- Circle (Diameter, Circumference Area)

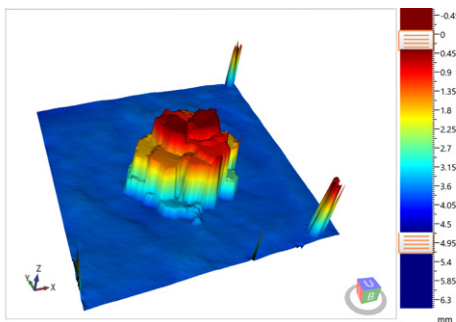

Views

- A-scan
- B-scan (vertical/horizontal, TFM)
- C-scan (Amplitude, ToF)
- 3D (ToF & Amp)
- Stitch view

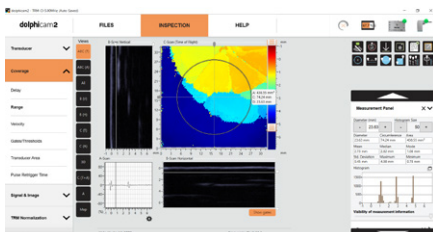

Features

- ✓ Live 1 Axis & 2 Axis Encoded Mapping
- ✓ Grid and free hand stitching
- ✓ Configuration setting files
- ✓ Full Matrix Capture (FMC)
- ✓ Total Focusing Method (TFM)
- ✓ TCG Functionality
- ✓ Digital Time Corrected Gain (TCG)
- ✓ Report configuration
- ✓ Defect Detection
- ✓ Histogram Statistical Data Graph

Other General Funcionality

- Color focus
- Reset settings to default
- Save screenshot
- Remote TRM activation
- Expanded view (hide config menu)
- Comfortable handle for portability
- On board, simple to use calibration function




dolphitech

For maximum image quality we also provide Total Focusing Method (TFM) reconstructions, with TFM images available on both vertical and horizontal B-scan views.

Specification

| | |
|---------------------------------|--|
| Data transfer rate | Up to 3.2 Gbit/s depending on transducer settings |
| Effective data acquisition rate | 30 full data sets (128x128 A-scans) per second with typical settings |
| Data processing | Low pass filter, data sampling, Total Focusing Method |
| Visualization | Single element signals (A-scans), vertical cross sections (B-scans), horizontal cross sections and material thickness mappings (C-scans) and 3D. |
| Adjustable settings | Measurement unit, material depth, gating, material sound velocity, transmit pulse shape, gain, filtering and averaging, time corrected gain, color palette |
| Statistical data | Mean (+Std. Deviation), Median, and Mode |
| Data file format | Open, HDF5 based file format |
| Time Corrected Gain (TCG) | 0 to 10 dB/μs |
| Digital Gain | +50dB |
| Averaging | 1 - 16 |
| Delay | 1 - 82 μs |
| Depth | 1 - 120 mm @ 6,000 m/s |
| Velocity | 100 - 20,000 @ 6,000 (list of velocity) |
| Gates | 3 separate gates |
| Amplitude threshold | Threshold for each gate |
| Capture method (for C-scan) | Max Absolute / Negative / Positive |
| A/B Scan Mode (RF) | Full, Absolute. Envelope |
| Color palettes | (Jet, gray, grav-inv, autumn bone, winter, rainbow, ocean, summers, spring, hsv, pink, hot, customizable) |
| Image filter | None, gaussian, median |

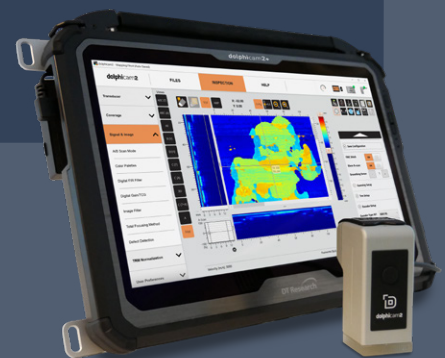

MORE INFORMATION

Want to learn more about what you can do with the dolphicam2+

Contact us to arrange a 10-minute demonstration with one of our expert consultants to understand how you can utilize dolphicam2+

admin@nexxis.com.au